


System Specifications

Frequency Response

66 Hz - 20 kHz (± 1.5 dB)

Low cutoff -6dB
55 Hz

High cutoff -6dB
23 kHz

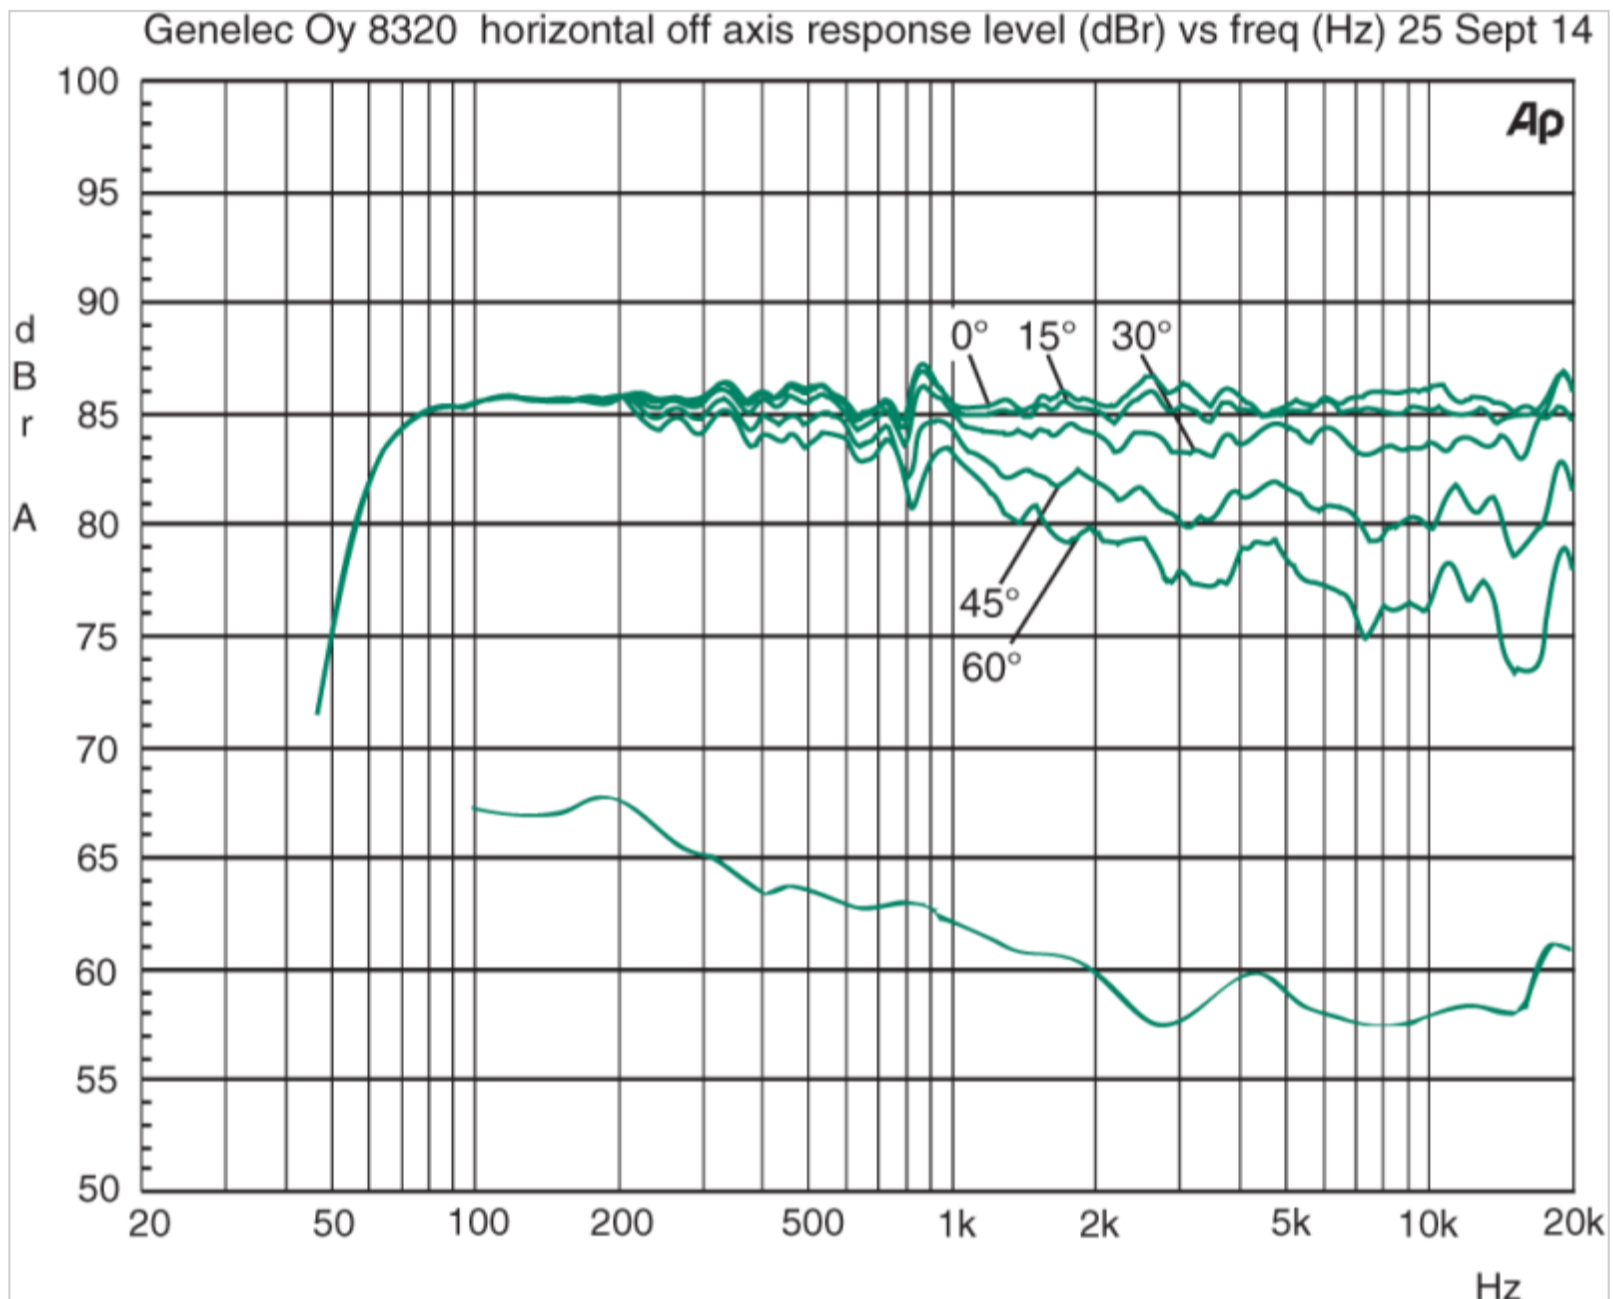

SPL

Peak SPL
 ≥ 107 dB

Maximum peak acoustic output per pair, at 1 m distance with music material.

Short term max SPL
 ≥ 100 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz.

Long term max SPL
 ≥ 94 dB

Maximum long term RMS acoustic output in same conditions with IEC weighted noise (limited by driver unit protection circuit).

Self-generated noise

0.5% THD @ 1 kHz

System Specifications

Frequency Response


66 Hz - 20 kHz (± 1.5 dB)

Low cutoff -6dB

55 Hz

High cutoff -6dB

23 kHz

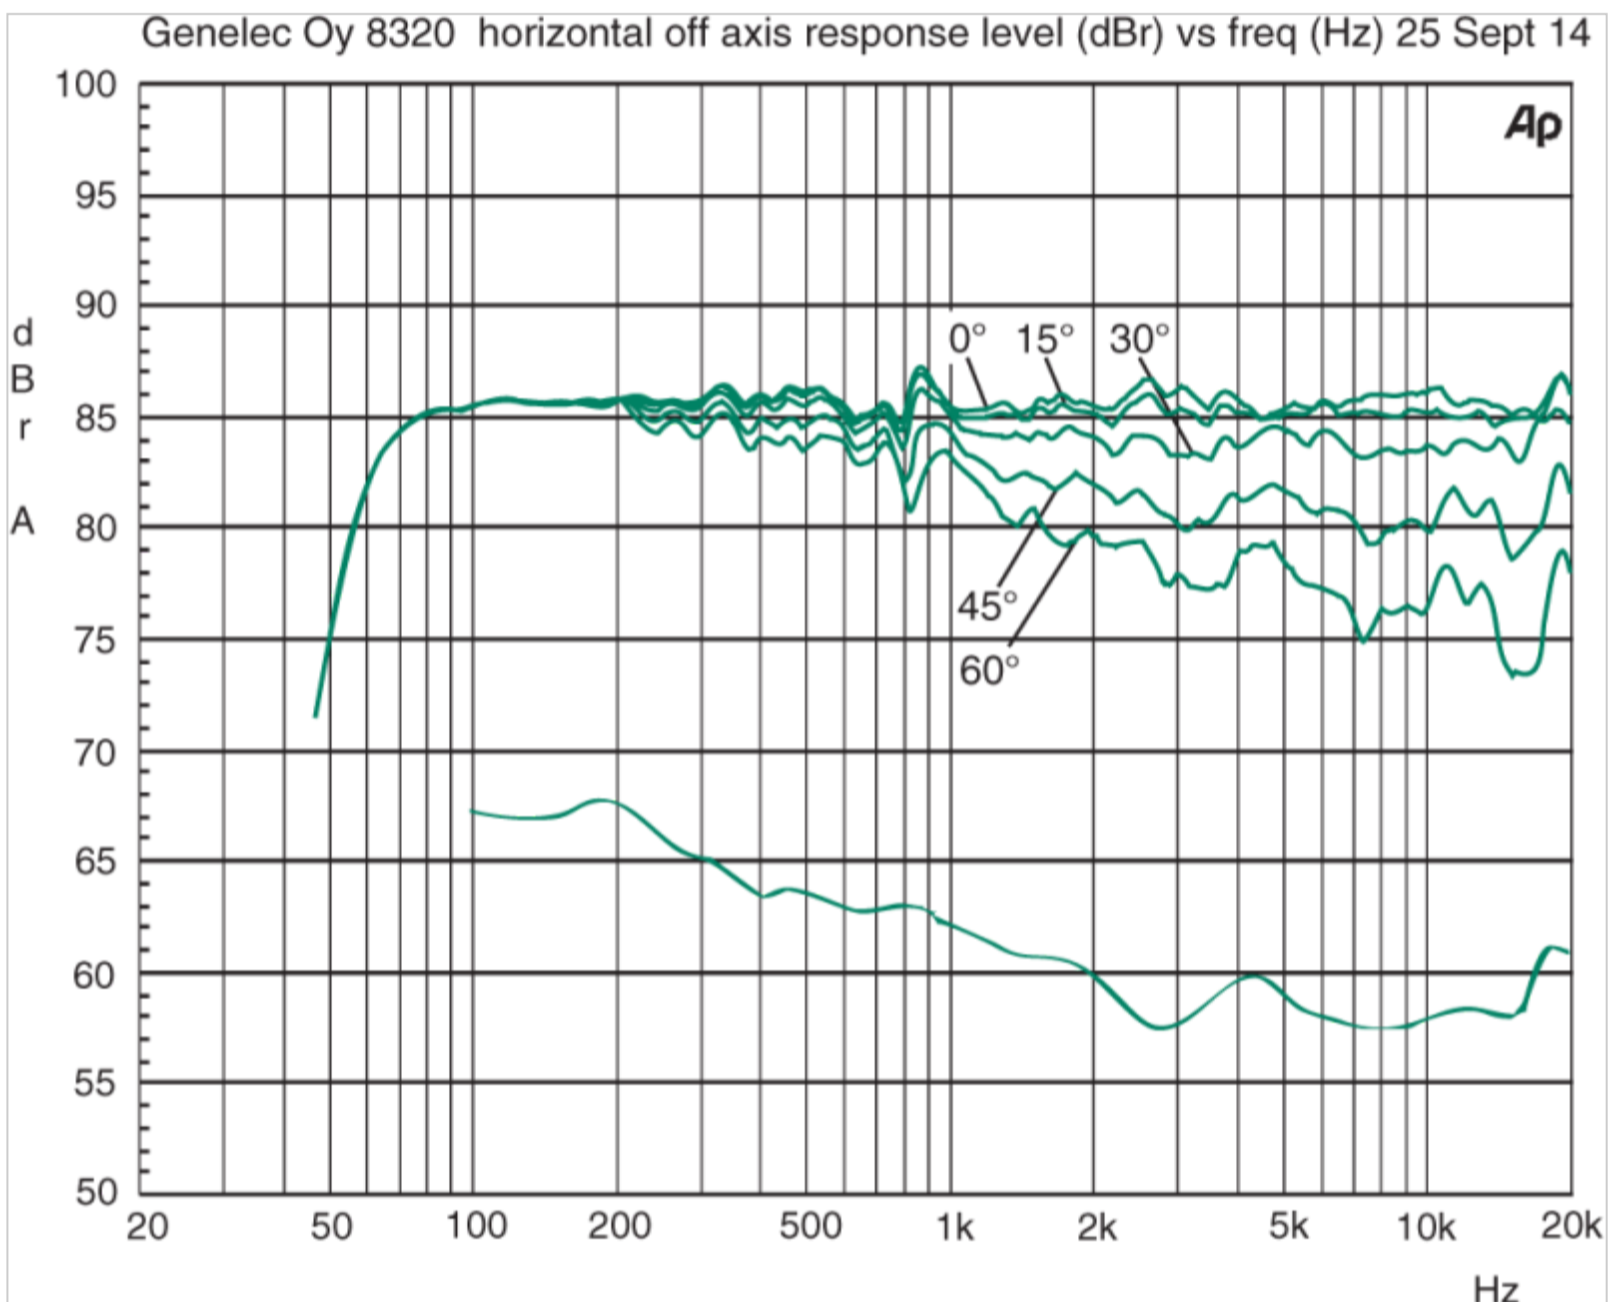

SPL

Peak SPL

≥ 107 dB

Maximum peak acoustic output per pair, at 1 m distance with music material.

Short term max SPL

≥ 100 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz.

Long term max SPL

≥ 94 dB

Maximum long term RMS acoustic output in same conditions with IEC weighted noise (limited by driver unit protection circuit).

Self-generated noise

8320 SAM™ Studio Monitor

Technical Specifications

System Specifications

Frequency Response


66 Hz - 20 kHz (± 1.5 dB)

Low cutoff -6dB

55 Hz

High cutoff -6dB

23 kHz

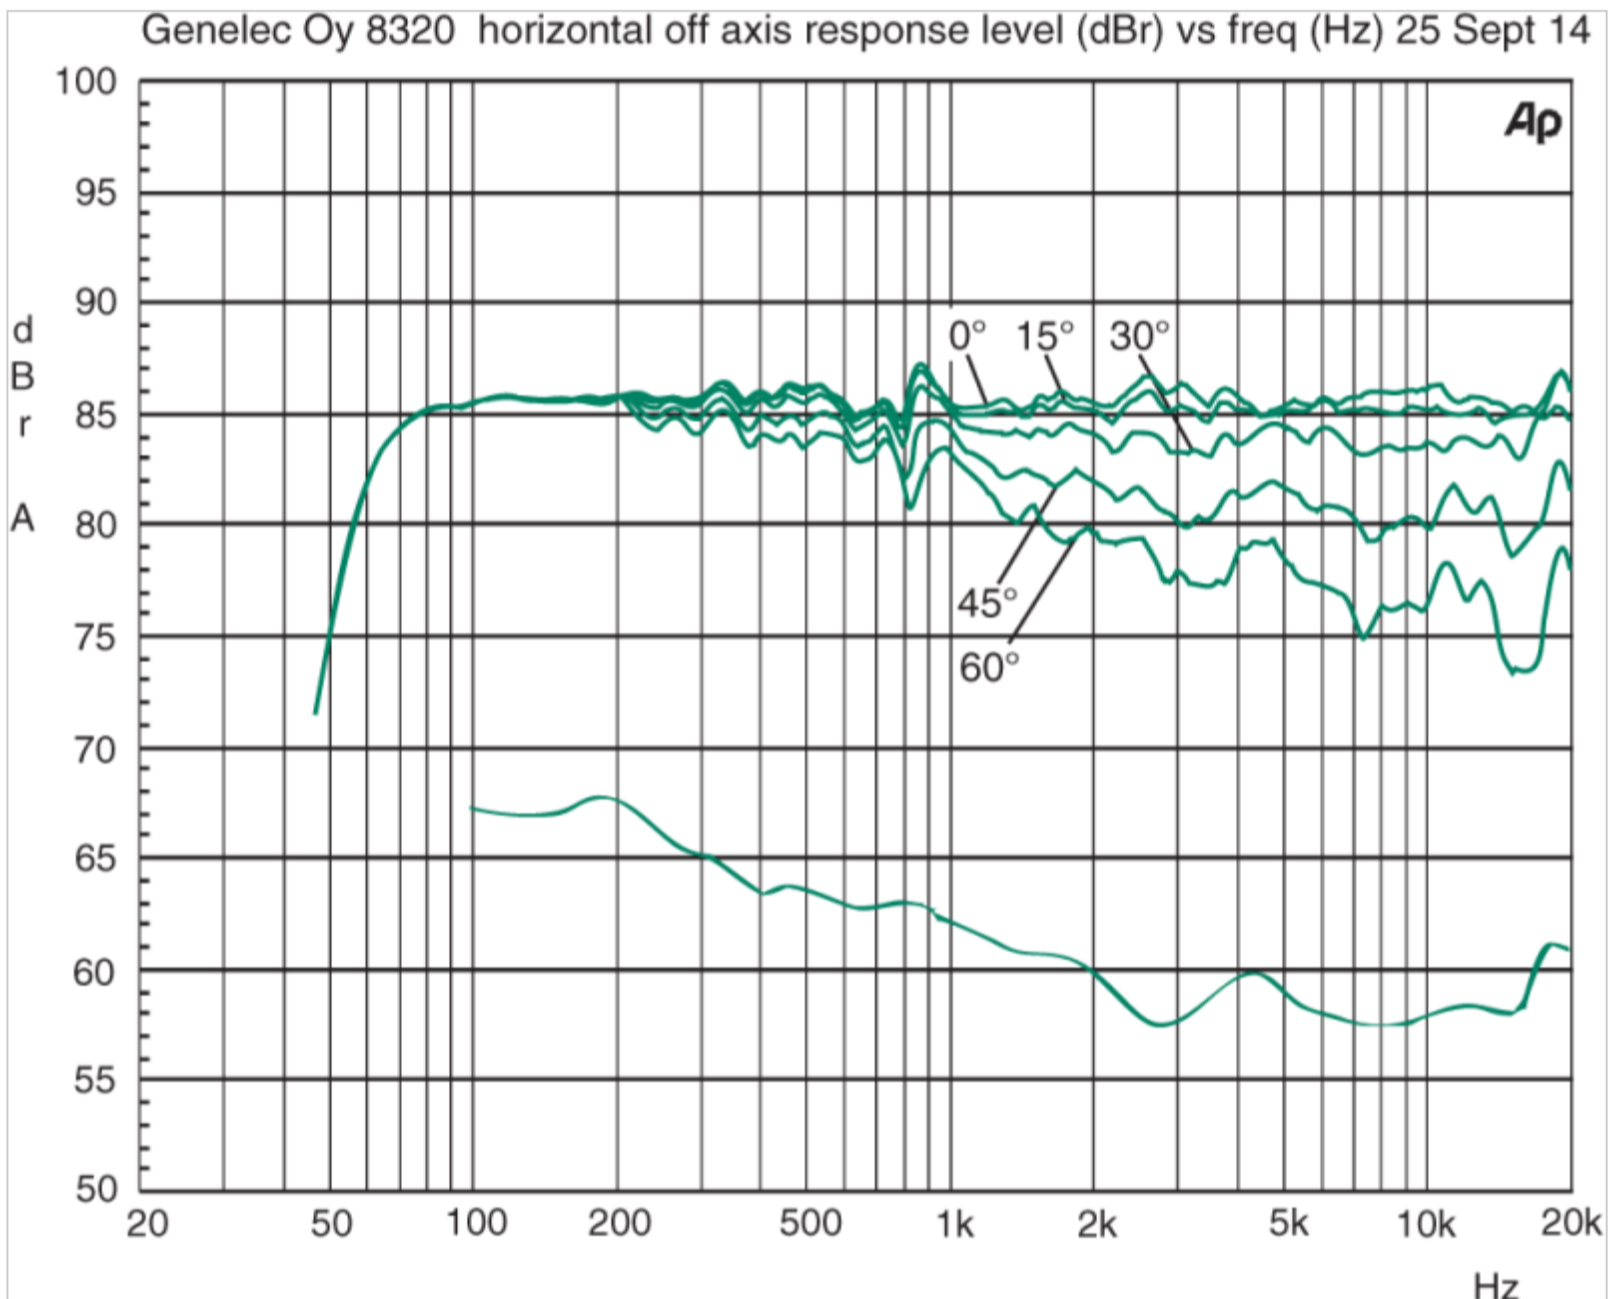

SPL

Peak SPL

≥ 107 dB

Maximum peak acoustic output per pair, at 1 m distance with music material.

Short term max SPL

≥ 100 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz.

Long term max SPL

≥ 94 dB

Maximum long term RMS acoustic output in same conditions with IEC weighted noise (limited by driver unit protection circuit).

Self-generated noise

8320 SAM™ Studio Monitor

Technical Specifications

System Specifications

Frequency Response


66 Hz - 20 kHz (± 1.5 dB)

Low cutoff -6dB

55 Hz

High cutoff -6dB

23 kHz

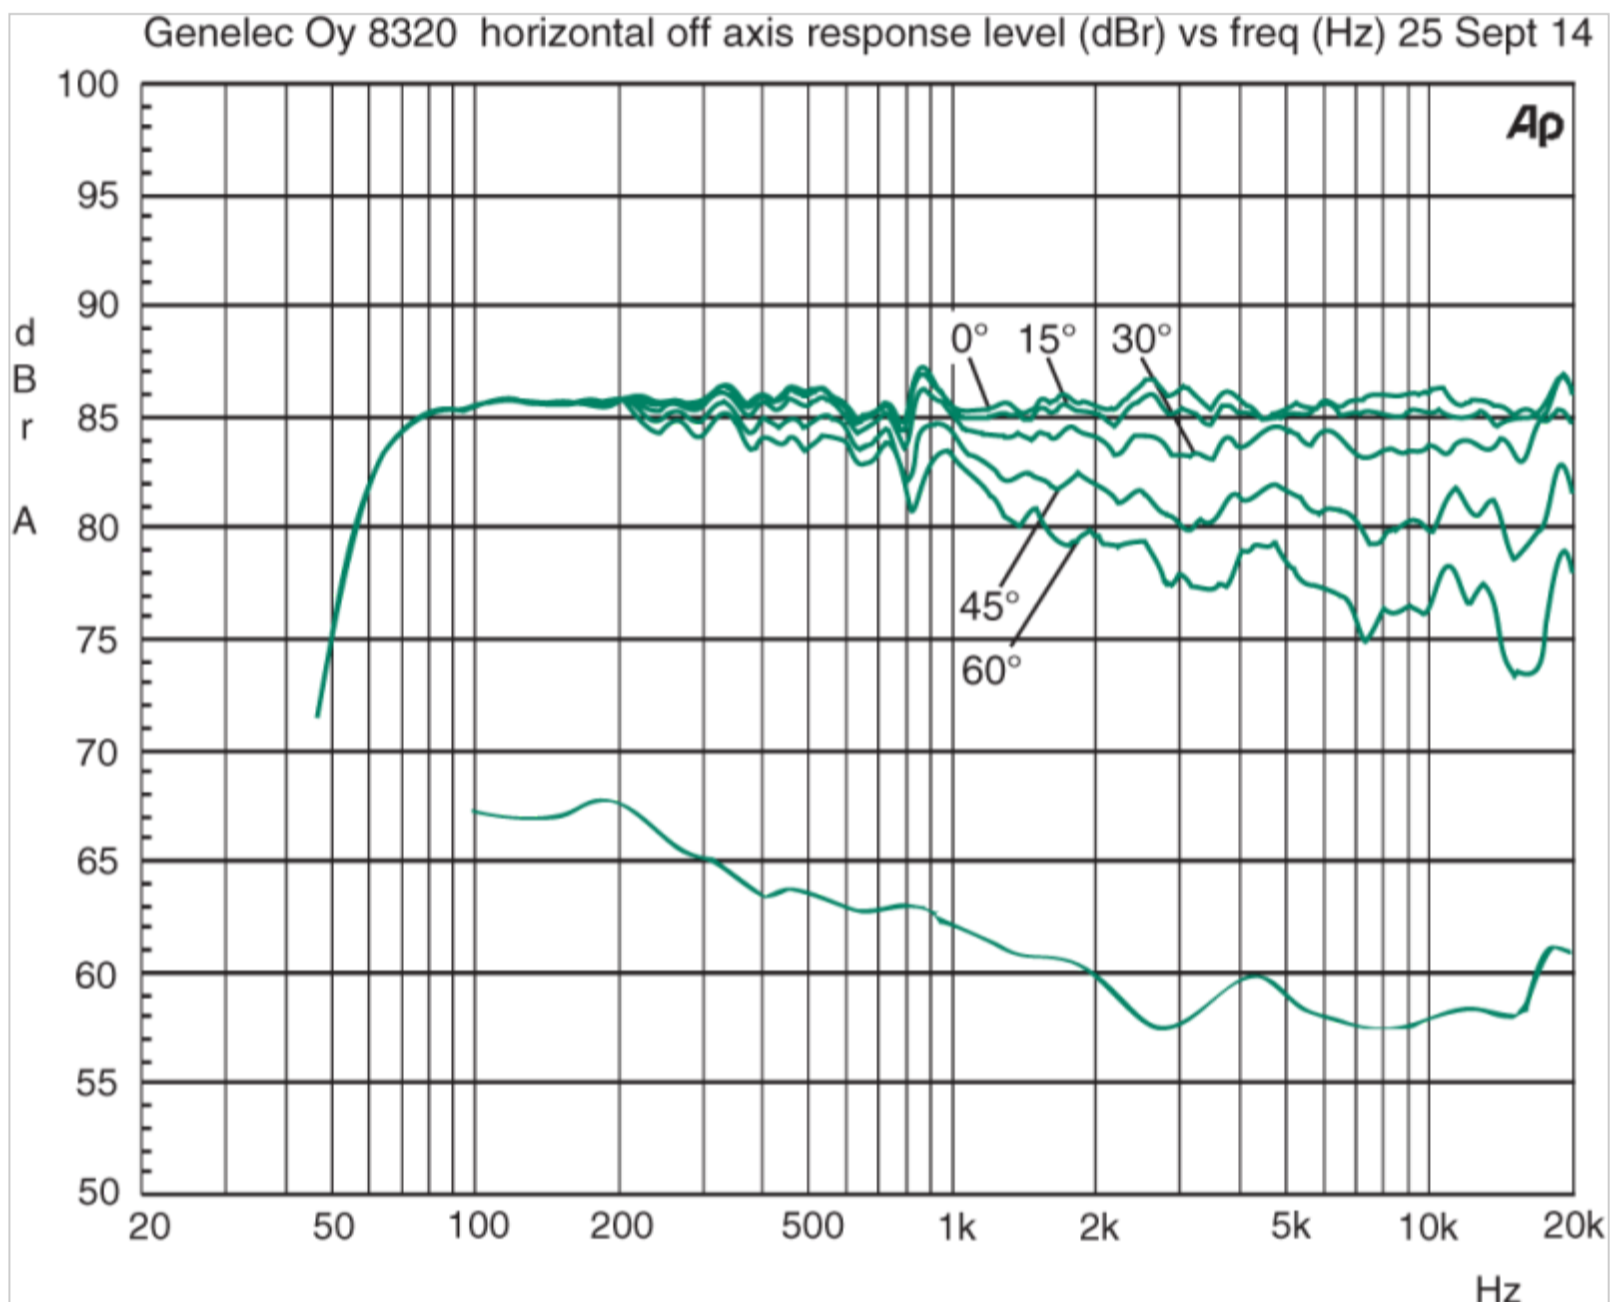

SPL

Peak SPL

≥ 107 dB

Maximum peak acoustic output per pair, at 1 m distance with music material.

Short term max SPL

≥ 100 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz.

Long term max SPL

≥ 94 dB

Maximum long term RMS acoustic output in same conditions with IEC weighted noise (limited by driver unit protection circuit).

Self-generated noise

8320 SAM™ Studio Monitor

Technical Specifications

System Specifications

Frequency Response


66 Hz - 20 kHz (± 1.5 dB)

Low cutoff -6dB

55 Hz

High cutoff -6dB

23 kHz

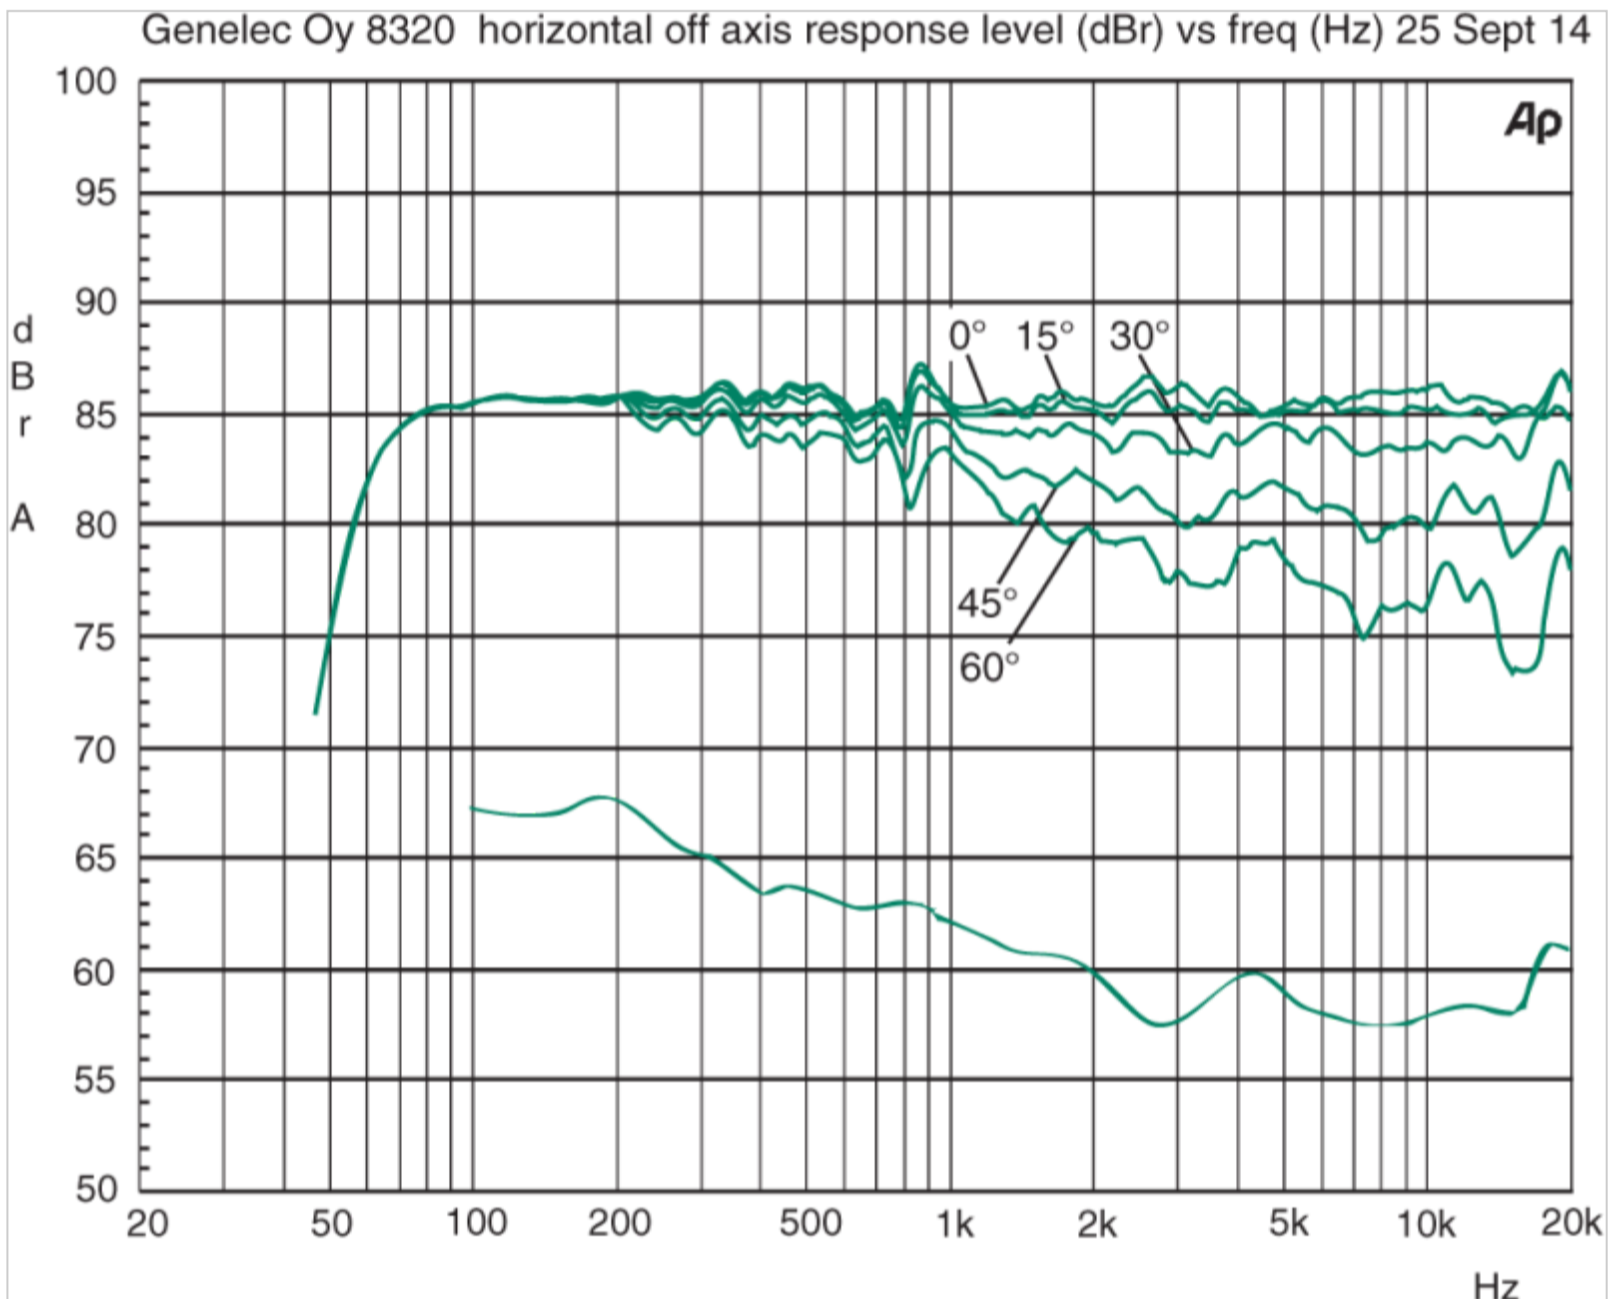

SPL

Peak SPL

≥ 107 dB

Maximum peak acoustic output per pair, at 1 m distance with music material.

Short term max SPL

≥ 100 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz.

Long term max SPL

≥ 94 dB

Maximum long term RMS acoustic output in same conditions with IEC weighted noise (limited by driver unit protection circuit).

Self-generated noise

8320 SAM™ Studio Monitor

Technical Specifications

System Specifications

Frequency Response


66 Hz - 20 kHz (± 1.5 dB)

Low cutoff -6dB

55 Hz

High cutoff -6dB

23 kHz

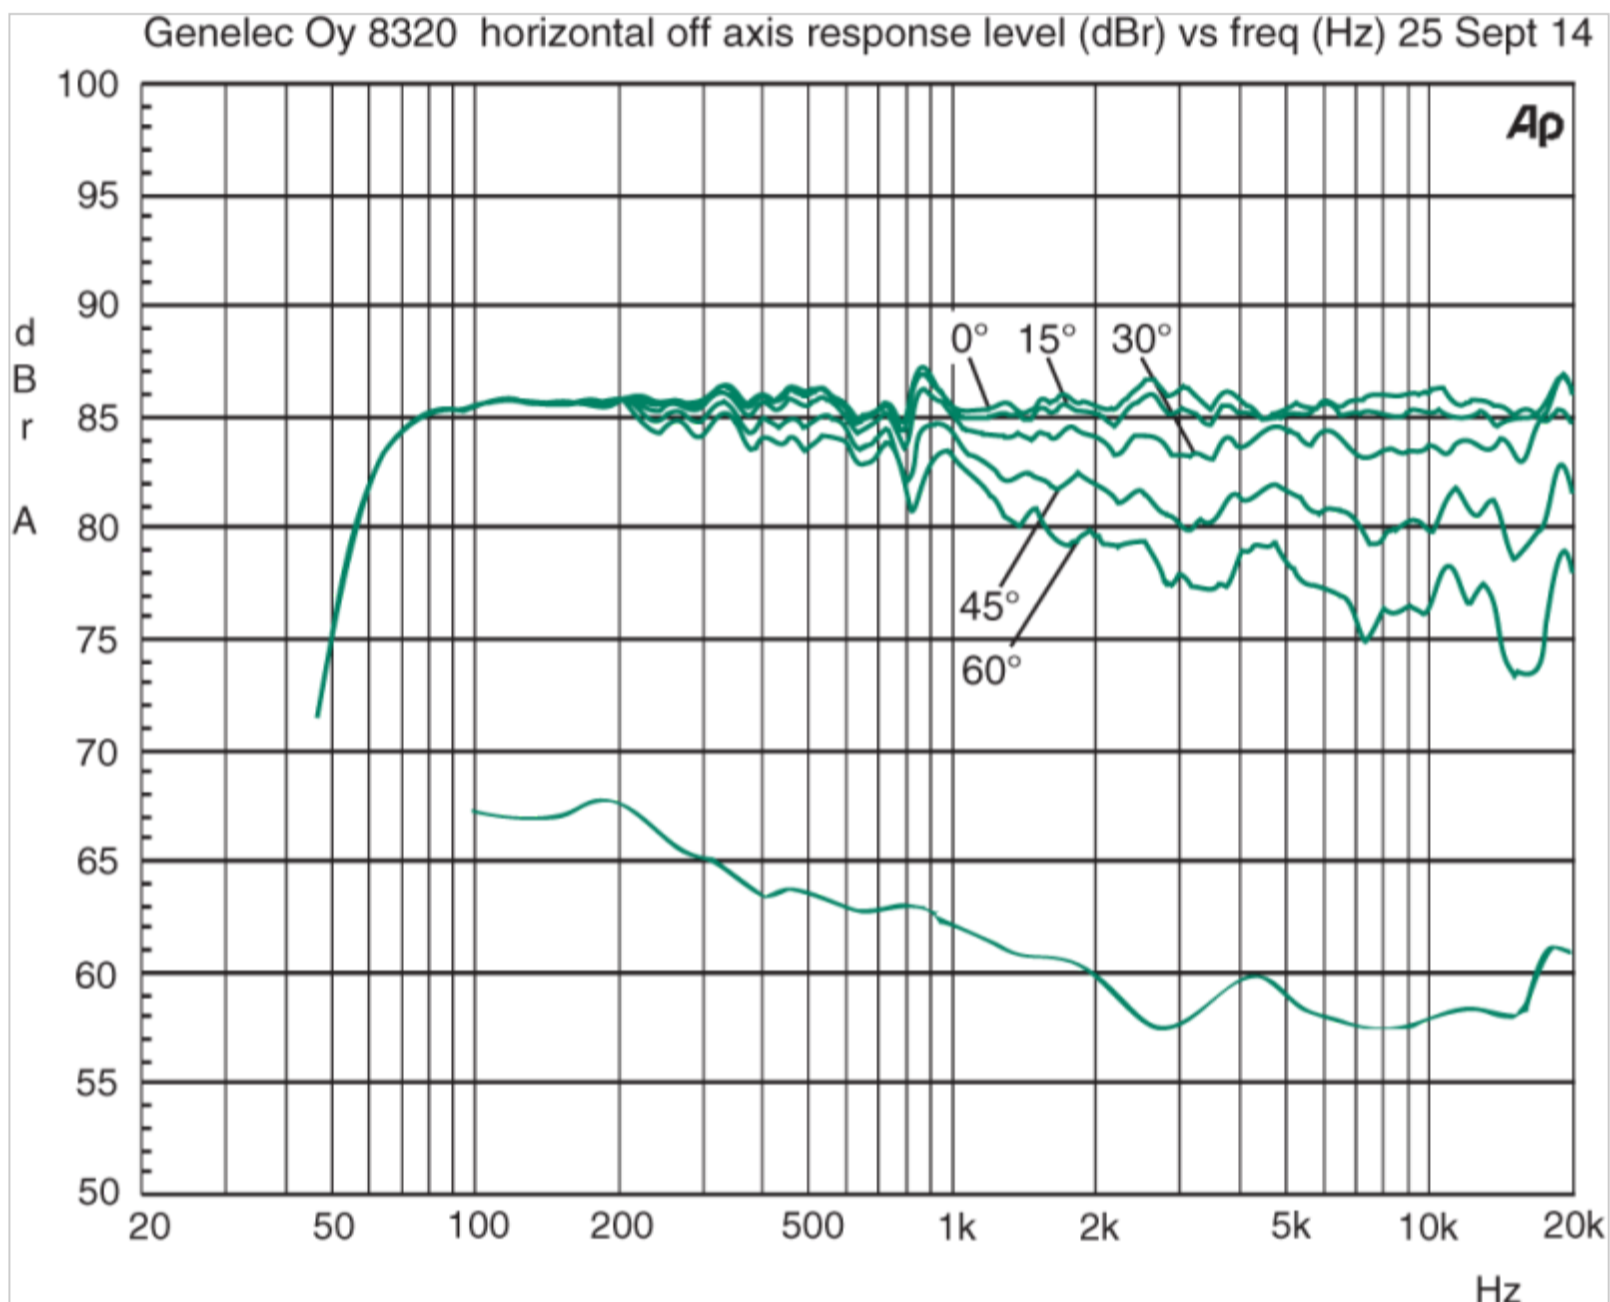

SPL

Peak SPL

≥ 107 dB

Maximum peak acoustic output per pair, at 1 m distance with music material.

Short term max SPL

≥ 100 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz.

Long term max SPL

≥ 94 dB

Maximum long term RMS acoustic output in same conditions with IEC weighted noise (limited by driver unit protection circuit).

Self-generated noise

8320 SAM™ Studio Monitor

Technical Specifications


System Specifications

Frequency Response

66 Hz - 20 kHz (± 1.5 dB)

Low cutoff -6dB
55 Hz

High cutoff -6dB
23 kHz

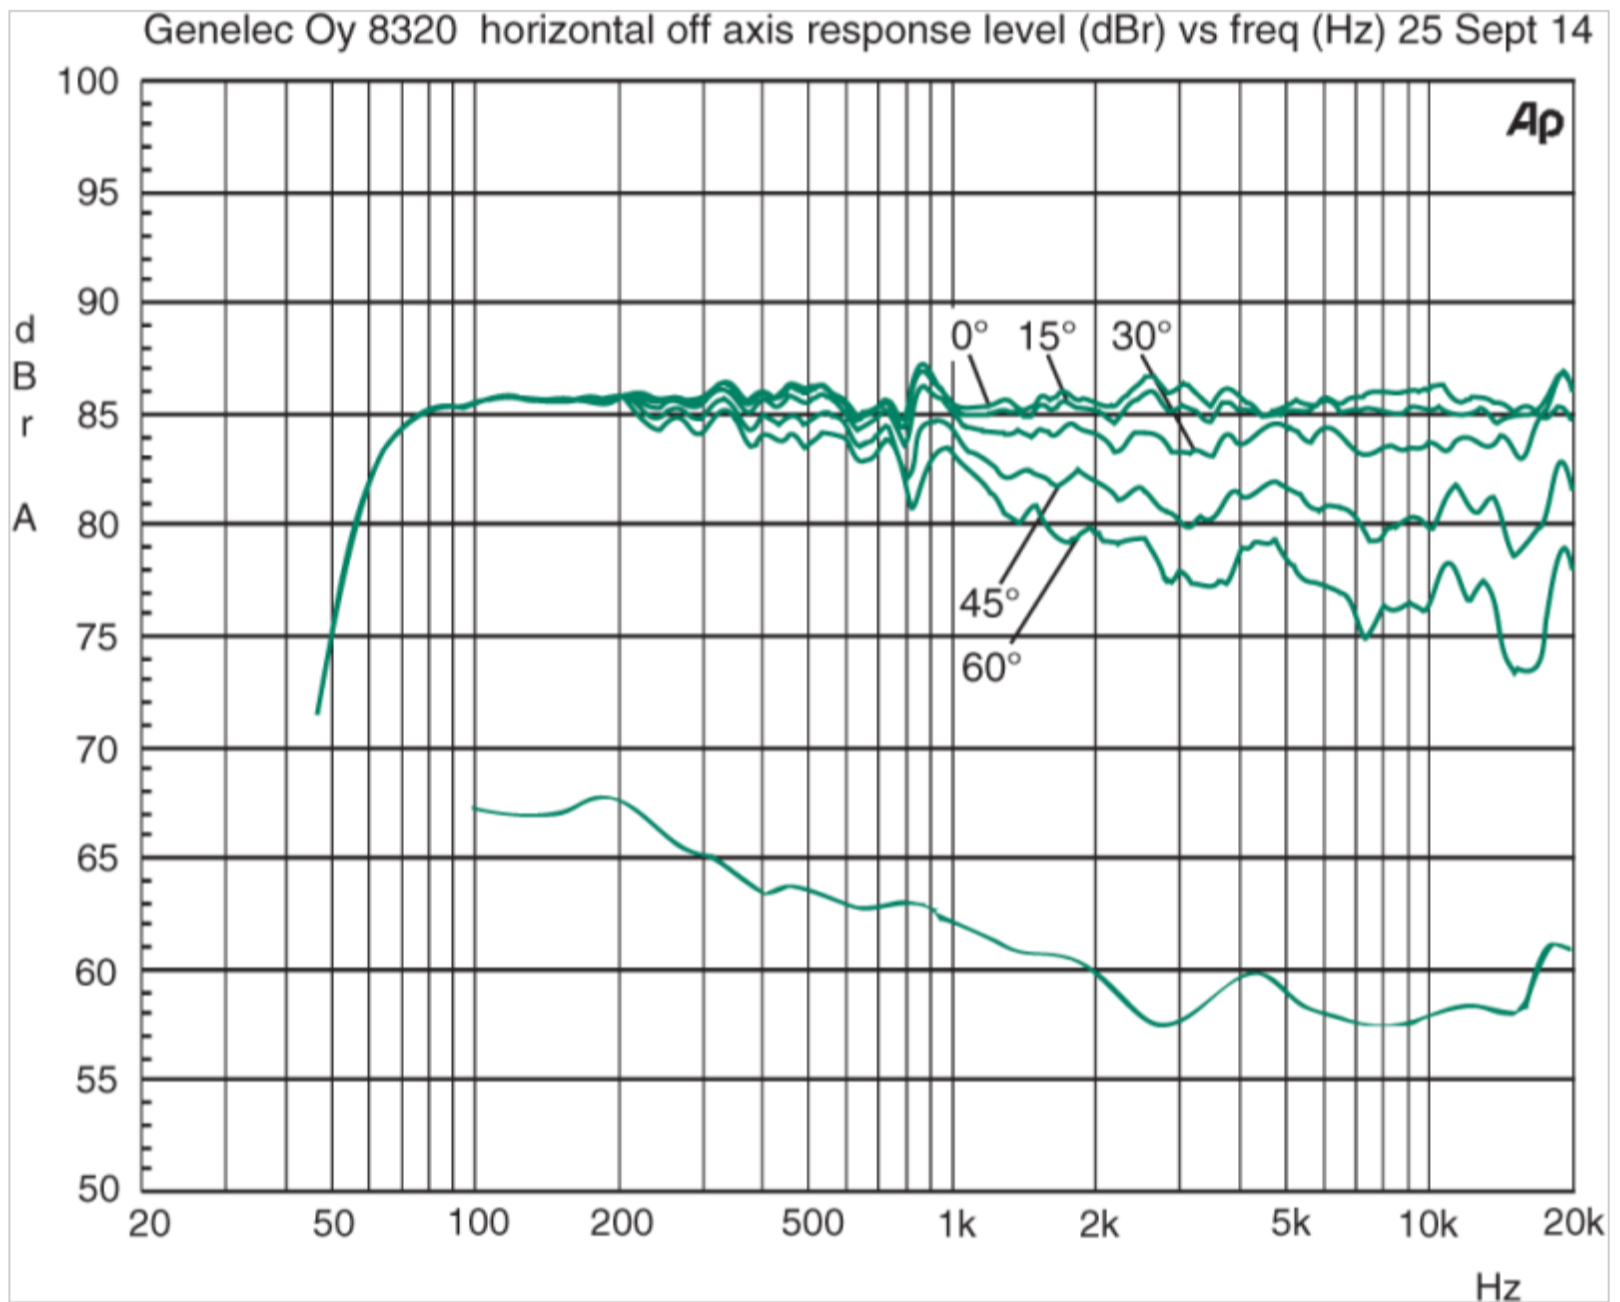

SPL

Peak SPL
 ≥ 107 dB

Maximum peak acoustic output per pair, at 1 m distance with music material.

Short term max SPL
 ≥ 100 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz.

Long term max SPL
 ≥ 94 dB

Maximum long term RMS acoustic output in same conditions with IEC weighted noise (limited by driver unit protection circuit).

Self-generated noise

