




CERTIFIED  
**COMBINED FIRE AND  
BURGLARY**  
PROTECTION AND  
MAXIMISED  
STORAGE FOR YOUR  
**PEACE OF MIND**



# DUOGUARD GIII

BURGLARY & FIRE-RESISTANT PROTECTION




## KEY FEATURES

- Burglary protection in accordance with the European standard, EN 1143-1, as certified by ECB•S for Grade III.
- Certified for 1 hour fire resistance by ECB•S in accordance with fire resistance class NT Fire 017 – 60 paper and RISE's certification rules for fire resisting storage cabinets
- Torch-resistant barrier material – Dualite – ensures burglary and fire protection whilst also reducing its total weight and minimising transportation and installation costs.
- The three-way boltwork is made from solid steel bolts.
- Fitted with an active relocker and anti-drilling plates incorporated into the boltwork to withstand burglary attempts.
- A Class B mechanical key lock or a Class B high-security electronic lock, approved in accordance with EN 1300, are both available as primary lock options. The primary lock can be supplemented by a combination lock or both a key lock and electronic lock can be fitted.
- Ergonomic soft-touch handle and a range of internal fittings to maximise storage capacity.


# DUOGUARD GIII

## PRODUCT SPECIFICATIONS

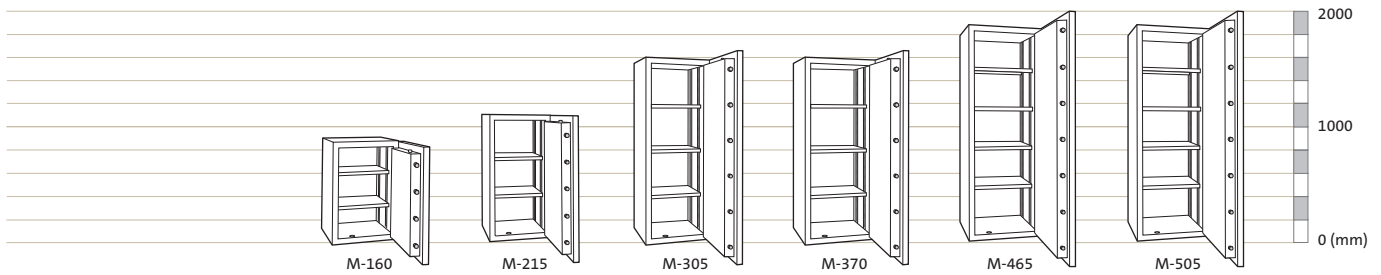

Model	External Height (mm)	External Width* (mm)	External Depth** (mm)	Internal Height (mm)	Internal Width*** (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	No. of Shelves
M-160	901	626	587	785	510	396	159	415	2
M-215	1176	626	587	1060	510	396	214	517	2
M-305	1626	626	587	1510	510	396	305	687	3
M-370	1626	701	611	1510	585	420	371	753	3
M-465	1876	701	641	1760	585	450	463	880	4
M-505	1876	701	681	1760	585	490	505	915	4

Projection of hinge\*(20mm) and projection of handle\*\* (65mm) not included. \*\*\*Width excluding shelf racking strips. Racking reduces the internal width by 15mm

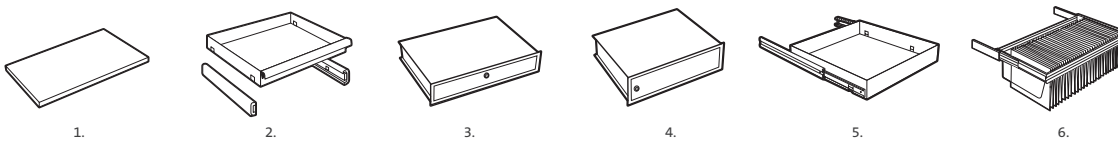

### OPTIONAL INTERNAL FITTINGS

1. Shelf
2. Extendable shelf
3. Lockable drawer
4. Lockable compartment
5. Extensible tray
6. Suspension file frame

### LOCK OPTIONS

As the primary locking option, DuoGuard Grade III safes can be fitted with either a high-security electronic lock (Class B) or a key lock (Class B). The primary lock can be supplemented by a combination lock or both a key lock and electronic lock can be fitted. All locks are independently tested and are certified in accordance with the EN 1300 standard. DuoGuard's high-security electronic lock – certified Class B – includes the following features, easily programmed by the owner:

- 1 master code, 1 supervisor code and 8 user codes.
- Time delay of up to 99 minutes between lock being operated and door being opened.
- Opening window between 1–19 minutes.
- Equipped with time delay override.
- Optional function to raise silent alarm if lock is being opened under duress.

### FIRE TESTING

DuoGuard GIII has been approved in accordance with the Swedish standard, NT Fire 017 – 60 Paper, which means the safe will protect paper documents for 60 minutes. This certification was awarded by ECB•S.

#### STAGE 1

The cabinet is placed in a furnace and heated to a temperature of almost 1000°C for 60 minutes to simulate the effects of a severe fire.

#### STAGE 2

The cabinet is removed from the furnace and cooled. When opened, the inner temperature of the cabinet must not exceed 150°C.

### BURGLARY TESTING

DuoGuard GIII has been approved by ECB•S in accordance with the European EN 1143-1 standard for burglary protection in Grade III. A range of attack tools were used to test DuoGuard GIII's level of resistance, ranging from basic tools to sophisticated thermal and electrical equipment.

[www.chubbsafes.com](http://www.chubbsafes.com)