


Key Features

- Integrated with myViewBoard software
- · Multi-tasking capabilities for enhanced lesson delivery
- Embrace simplicity and organization with the USB-C onecable solution, offering 65W of Power Delivery.
- Intuitive user interface and fast app launch for smooth operation
- Powered by Android 11



Product **Description**

The ViewBoard IFP33 Series harmonizes a touch display with versatile software to create a comprehensive classroom solution for interactive and engaging learning. This interactive flat panel delivers exceptional image quality in 4K UHD, thanks to cutting-edge bonding technology that provides clearer colors, enhanced contrast, and reduced glare. The 40-point touchscreen interface, equipped with Ultra Fine Touch Technology, empowers students and teachers to collaborate seamlessly, using either their fingers or dual-tip pens, for an intuitive pen-on-paper experience. Powerful built-in front-facing speakers and a USB-C port sort out for a complete and convenient multimedia experience. The ViewBoard IFP33 Series is preinstalled with myViewBoard to offer advanced lesson delivery options for teachers and powerful device management tools for administrators.

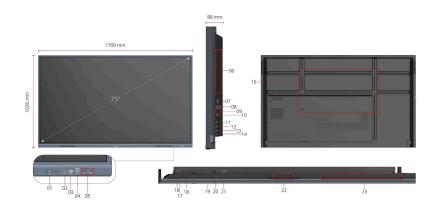

- 1. POWER ON/OFF
- 2. USB C
- 3. HDMI 1
- 4. TOUCH 1 5. USB 3.0x2
- 6. OPS Slot
- 6. OPS SIOT 7. RS-232
- 8. LAN 9. USB 2.0x2
- 10. TOUCH 2 11. HDMI 2
- 11. HDMI 2 12. HDMI 3 13. HDMI OUT
- 14. USB

- 15. VESA® Wall Mount (800x400mm)
- 16. SPDIF
- 17. AUDIO in 18. AUDIO out
- 18. AUDIO 19. VGA
- 20. Power On/OFF
- 21. AC IN

Visit Us

www.viewsonic.com

DISPLAY	Viewoonie viewboard in 1 7000 viewboards	BUNDLE SOFTWARE	asheet vieweenie Middle East
Panel Size:	75"	Basic Annotation Software:	myViewBoard Whiteboard
Panel Type:	TFT LCD Module with DLED Backlight, IPS	Pro Annotation Software:	myViewBoard for Windows (Embedded in optional Windows
Display Area (mm):	1649.664(H) × 927.936(V) (74.6'		Slot-in PC)
	diagonal)	Wireless Presentation:	myViewBoard Display
Aspect Ratio:	16:9	Wireless Presentation with Touc Feedback: Viewboard Cast:	^{ch} Yes
Resolution:	UHD 3840x2160(Pixels)	SPECIAL FEATURES	
Colors:	1.07B colors	All in one HCB next.	(combine slot-in
Brightness:	400 nits		PC/Android/HDMI USB port) Front "SmartPort™ USB" to all
Contrast Ratio:	5000:1 (max. with DCR enabled)		channels.
Response Time:	8ms	Simple LAN sharing between IF and slot-in device:	P 10/100M for Android & Slot-in PC
Viewing Angles:	H=178, V=178	Light Sensor:	Yes
Backlight Life:	50,000 Hours (Min.)	POWER	165
Surface Treatment:	Hardness:9H Anti-glare coating	Voltage:	100-240V AC
Orientation:	Landscape	Consumption:	On:106W; Off: ≤ 0.5W
PLATFORM		= ERGONOMICS	On. 100W, On. ≥ 0.5W
Processor:	Quad-core ARM Cortex (A55*4)	Wall Mount (VESA®):	800×400
RAM:	4GB DDR4	OPERATING CONDITIONS	800x400
Storage:	32 GB	Temperature (° C):	0°C to 40°C
тоисн		. , ,	
Type/ Tech:	Ultra Fine Touch Technology	Humidity:	20% ~ 80% RH non-condensing
Touch Point:	40 points touch	DIMENSIONS (W X H X D)	1700 v 1020 v 99 mm / 67 2 v
INPUT		Physical (inch / mm):	1709 x 1020 x 88 mm / 67.3 x 40.2 x 3.5 in
HDMI:	HDMI-IN 2.0 x 3 (3840x2160 @60Hz)	Packaging (inch / mm):	1863 x 225 x 1140 mm / 73.3 x 8.6 x 44.9 in
RGB / VGA:	x1	WEIGHT	
Audio:	x1	Net (lb / kg):	104.3lb/47.3kg
RS232:	x1	Gross (lb / kg):	133.5lb/60.55kg
OPS:	x1 (Optional Intel Standard OPS)	REGULATIONS ECCUCESORS EDEAT OF EMOLIVE OF CR. BOHS Groop BOM 8	
WiFi:	x1 (Optional VB-WIFI-002/VB- WIFI-004/VSB-050)	FCC/ICES003, EPEAT, CE EMC, LVD or CB, RoHS Green BOM & RoHS DoC, ErP, REACH SVHC List & DoC, EEL, WEEE, BSMI,BIS PACKAGE CONTENTS	
ОИТРИТ	WII 1-004/ V3B-030)		
HDMI:	HDMI 2.0 x1	 3m power cord by ship area 2. Remote control with AAA battery 3m touch USB cable 4. Touch pen x 2 (VB-PEN-009) Quick Start Guide + Compliance statement 6. RS232 adapter 7. Clamp x Camera Plate 9. Screw x 8 (camera 2+2, wall mount 4) 10. HDM cable 3m 	
Audio:	x1		
SPDIF:			
	x 1	COMPATIBLE SLOT-IN PC	
RJ45:	x2	VPC2-O series/VPC2-O-1B seri	ies/VPC12-WPO-15/16
	XZ		
Type A:	USB3.0:Front x2, Rear x2;		
Type B:	USB2.0 x1 x2 (Rear x1 + Front x1)		
,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	Front*1 (PD65W + DP1.2 + Data		
Type C:	USB2.0 + 10M/100M sharing)		
Type C: SPEAKERS			
SPEAKERS			
SPEAKERS 16W x 2	ATE		
SPEAKERS 16W x 2	ATE	 	
SPEAKERS 16W x 2 TOP CAMERA PLA	ATE		