

NEC PA Series

Powerful installation projectors equipped to take on the most demanding integration projects

FLEXIBILITY ENABLES PERFORMANCE


- High-performance video processing/scaling, utilizing the Hollywood Quality Video processor, is designed for computer signals as well as standard or high-definition video. The technology produces superior video processing using pixel-based, motion-adaptive de-interlacing to remove undesirable motion artifacts typical of interlaced signals. This processing creates life-like images in applications such as video conferencing.
- Bright enough for most applications: 6000 lumens (PA600X), 5500 lumens (PA550W), 5000 lumens (PA500U and PA500X)

INTEGRATED NETWORKING AND ASSET MANAGEMENT

- Integrated RJ45 connection for quick connection to the LAN (10/100 base-T capability)
- Optional high-speed wireless LAN IEEE 802.11b/g/n
- Desktop control allows you to securely transmit information wirelessly to the projector from a docking station or PC in another room
- Image Express Utility (IEU 2.0; compatible with Windows or Mac operating systems) dedicated projector software provides wired and wireless data transmission via peer-to-peer or over the network
- Broadcast mode allows you to send information from one computer to several projectors
- Windows Network Projector function within Windows Vista connects directly to networked projectors without the need for additional proprietary software
- Windows Remote Desktop function allows you to control a networked computer by connecting a USB mouse and keyboard directly to the projector's USB input
- Windows Network Drive Function displays multimedia files (.jpeg, .bmp, .png, .mpeg2 or .wmv9) in the Windows shared folder on a local network using the Viewer function—all without bringing your PC into the conference room
- Windows Media Connection Function displays multimedia files (.mpeg2, .jpeg or .wmv9) stored on the Windows Media Connect server or a local network using the Viewer function—all without bringing your PC into the conference room
- Crestron Roomview Connected™



SECURITY FEATURES PROVIDE PEACE OF MIND

- Cabinet control lock setting enables user to deactivate buttons on cabinet to prevent unwanted changes to projector settings
- Logo lock restricts changes to logo saved in projector memory
- Password protection restricts unauthorized use of projector
- Email notification informs the system administrator when the lamp approaches the end of its useful life

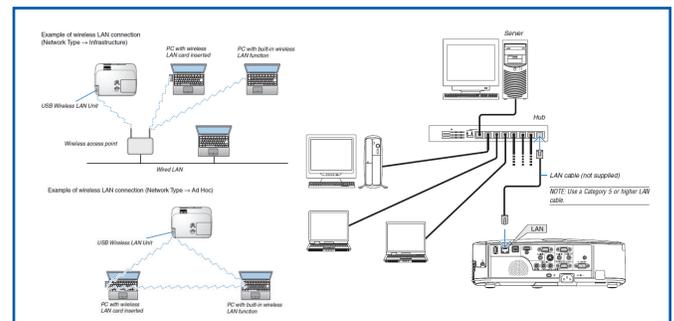

Lens Shift

Enjoy greater installation flexibility with 60% vertical lens shift and +/- 30% horizontal lens shift. Ships lensless with a complete line of optional bayonet style lenses (5) for quick and easy exchange. Lens throw distances range from 2.5 to 68.5 feet.

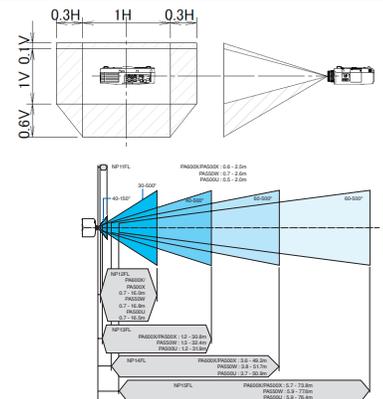

Tilt-Free Installation

PA Series models can be rotated freely (360°) in order to point up or down depending on the installation requirements.

DESIGNED WITH THE ENVIRONMENT IN MIND

- **Extended lamp life with ECO Mode™ technology** increases lamp life up to 4000 hours, while lowering power consumption
- **Power management** enables projector to automatically turn off when an incoming signal is not detected from any of the inputs
- **Auto Power On** via the RGB (15-pin) input connector when a signal is detected from a computer
- **Carbon savings meter** calculates the positive effects of operating the projector in ECO Mode, which is encouraged by an optional message at startup. A green ECO Mode button on the remote control makes the switch easy.
- **Quick start** (3 to 4 seconds) lets you begin presenting in seconds while quick shutdown (immediate power off with no cooling required after shutdown) ensures efficient energy usage
- **Sleep timer** can be set to automatically turn off the projector at set countdown times
- **Low power consumption** (0.2W in stand-by mode) minimizes energy costs
- **Direct power off** provides instantaneous shutdown of the projector



4000-hour filter life


NEC is committed to designing its products to provide long lifecycles. This commitment even extends to components within its products, including the improved filter. This virtually maintenance-free filter reduces the frequency at which cleaning is required, thereby decreasing your total cost of ownership. Filter replacement is only required at the time the lamp is replaced.



BUILT-IN SOFTWARE

Stacking correction

The industry's first built-in stacking correction capabilities (up to four projectors) allows the projectors to boost an image's brightness up to 24,000 lumens, which is ideal for larger-sized screens and environments with heavy ambient light. This feature also prevents the complete loss of an image, which can happen when using only one projector.

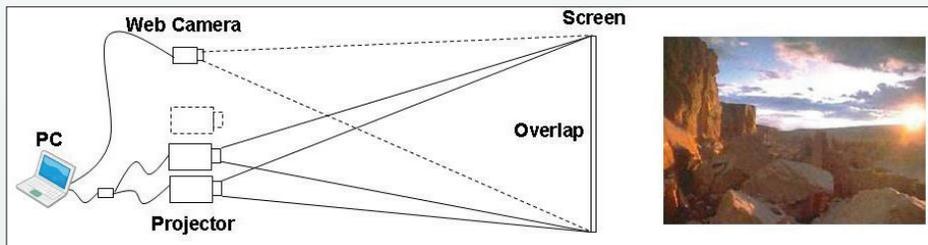

PIP/Side-by-Side

This function allows two sources to be displayed on the screen at one time in either a picture-in-picture or side-by-side configuration.



Wall color correction presets

These provide for adaptive color tone correction to display properly on non-white surfaces.

On a green wall...



BEFORE auto wall correction



AFTER auto wall correction




Edge blending

This function seamlessly blends multiple projected images to display a single high-resolution image.



DICOM SIM

DICOM Simulation enables users in medical environments to display accurate diagnostic images.

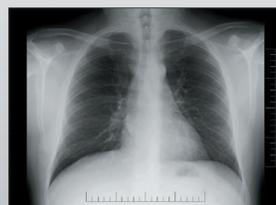

GET CONNECTED WITH A WIDE SELECTION OF INPUTS

- **Dual computer inputs** ensure quick switching between presentations
- **Four audio inputs (two mini stereo [Comp1 & Comp2], R/L [RCA - shared by video sources] and HDMI™)** make it easy to add sound to enhance your presentations

Remote control

Easy control from remote allows you to adjust lamp mode, aspect ratio, volume and image all with the touch of a button.



DisplayPort

This input provides PA Series models with expanded connectivity with advanced technology.



HDMI input

Among the PA Series' wide selection of inputs is an HDMI w/HDCP for connecting to high-definition sources such as Blu-ray players, cable boxes, satellite receivers and personal computers.



Input panel cover

This optional accessory creates a clean look for your installation, while hiding signal cables and the power cord.



USB Viewer

In instances when you'd prefer to leave your laptop behind for a presentation, PA Series projectors can deliver a solution. Using the presentation conversion software included with your projector, simply place your file onto a USB drive and plug it into the projector's USB port. This allows you to display images stored as .jpgs from optional USB memory.



Variable audio-out


This input enables the remote control to be used to adjust volume of self-powered external speakers that are connected to the projector. In stand-by mode, the audio-out stays active, allowing the last input used to pass to the self-powered external speakers.



ADVANCED SOFTWARE FEATURES

Cornerstone

Enhanced keystone correction allows for horizontal, vertical and diagonal image correction for aligned images even when the projector is set up at an angle to the screen.

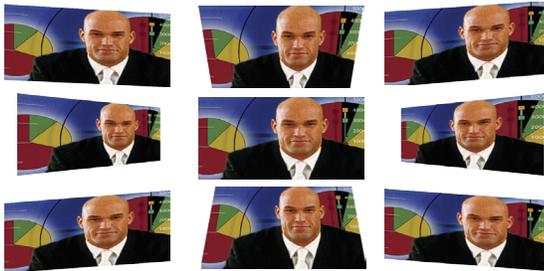


Virtual Remote™


Used via a network connection (wired/wireless), you can control the projector directly from a computer without the need for additional control cables.



Geometric Correction

Projecting an image isn't confined to a standard flat screen or wall with the NEC PA Series. Geometric correction allows these models to project an image on spheres, cylinders, corner angles and many more non-standard surfaces.

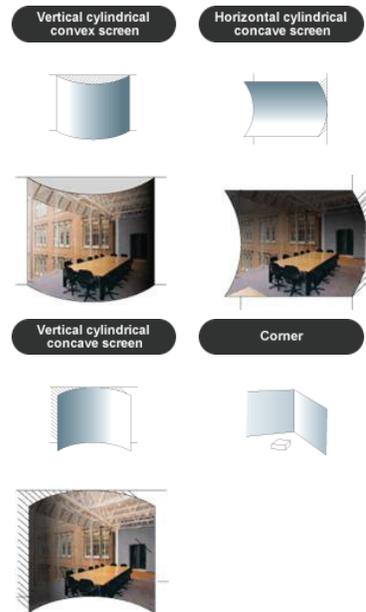

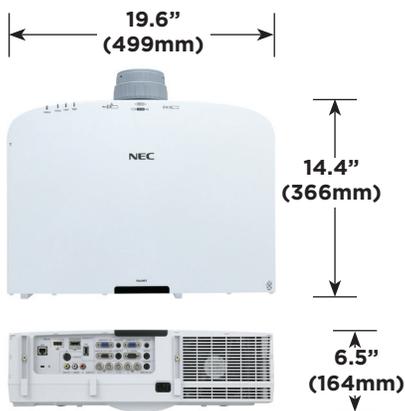

UNIQUE FEATURES

3D Reform™ allows you to square the image by adjusting horizontally, vertically or diagonally when the projector cannot be placed parallel or perpendicular to the screen

Advanced AccuBlend™ ensures detailed images when non-native resolution sources are connected to the projector

AutoSense™ automatically syncs with any computer signal and features one-touch image optimization

64-step image magnification with location control

Discreet source keys for source selection

Remote diagnostics enable the user to monitor and make adjustments to the projector remotely

Built-in HTTP page for control and monitoring over a LAN network. Email notification of error messages or lamp end-of-life can be sent to remote locations.

WARRANTY

Registered owners receive a 3-year parts and labor warranty including the first year of InstaCare. The lamp is covered for one year or 500 hours, whichever comes first. InstaCare provides the original owner one year of either limited 3 business day repair/return or next business day exchange.

IN THE BOX

Remote control, batteries, power cord, RGB signal cable, lens cap, user's manual on CD-ROM, quick start guide, product registration card, wired and wireless network setup guide, lens anti-theft screw

ORDERING MODEL NUMBERS

NP-PA600X
NP-PA550W
NP-PA550U
NP-PA500X

Specifications for PA600X/PA550W/PA500U/PA500X

OPTICAL

Display Technology
Light Output (lumens)
Resolution
Native
Maximum
Contrast Ratio (up to)
Lamp Type
Lamp Life (up to)
Screen Size (diagonal)
Throw Ratio
NP11FL
NP12ZL
NP13ZL
NP14ZL
NP15ZL
NP30ZL
Projection Distance
Projection Angle
Lens*
Zoom
Zoom Ratio
Focus
F-number, f-number
NP11FL
NP12ZL
NP13ZL
NP14ZL
NP15ZL
NP30ZL
Shift
Keystone Correction

PA600X/PA500X: 0.79" LCD with MLA
PA550W: 0.75" LCD with MLA
PA500U: 0.76" LCD with MLA
PA600X: 6000 normal
PA550W: 5500 normal
PA500X/PA500U: 5000 normal
PA600X/PA500X: XGA 1024 x 768
PA550W: WXGA 1280 x 800
PA500U: WUXGA 1920 x 1200
WUXGA 1920 x 1200
2000:1 with auto iris
330W AC / 264W eco
3000 hours normal / 4000 hours eco
25 to 500 in. / 0.64 to 12.7m
0.80:1
1.19 - 1.56:1
1.50 - 3.02:1
2.97 - 4.79:1
4.70 - 7.02:1
0.79 - 1.04:1
2.5 to 68.5 ft. / 0.74 to 20.9m
10.3 to 10.8" tele / 13.7 to 14.5" wide
Manual
NP11FL: NA / NP12ZL: 1 to 1.31 / NP13ZL: 1 to 2.01 / NP14ZL: 1 to 1.61 / NP15ZL: 1 to 1.53 / NP30ZL: 1 to 1.3
Manual
F= 2.3, f= 13.2mm
F= 2.2 to 2.69, f= 19.4 to 25.3mm
F= 1.7 to 2.37, f= 24.2 to 48.6mm
F= 2.2 to 2.64, f= 48.5 to 77.6mm
F= 2.2 to 2.7, f= 76.6 to 116.5mm
F= 1.9 to 2.1, f= 13.2 to 17.2mm
PA600X/PA500U/PA500X: Mechanical -0.1 to +0.5 vertical, +/-0.3 horizontal
PA550W: Mechanical -0.1 to +0.6 vertical, +/-0.3 horizontal
+/- 40° horizontal, +/- 30° vertical

SIGNAL COMPATIBILITY/CONNECTIVITY

Scan Rate
Horizontal
Vertical
Supported Video Standards
SD/HD Video Signal Compatibility
PC Signal Compatibility
Macintosh Compatibility
Input/Output Terminals
RGB1 (analog)
RGB2 (analog)
RGB3 (analog)
RGB4 (digital)
RGB5 (digital)
Video 1
Video 2
Audio
Monitor Out
Audio Out
Audio
External Control
Sync Compatibility
Networking

15 - 108 kHz
48 - 120 Hz
NTSC, NTSC4.43, PAL, PAL-60, PAL-M, PAL-N, SECAM
1080p, 1080i, 720p, 576p, 576i, 480p, 480i
VGA, SVGA, XGA, SXGA, SXGA+, UXGA, WUXGA
Yes
VGA 15-pin D-sub
VGA 15-pin D-sub
S-BNC
HDMI w/ HDCP
DisplayPort w/ HDCP
RCA
S-Video
Mini stereo
Yes
Mini stereo (Variable audio out)
10W mono
RS-232, IR, Wired LAN, DDC/CI, USB, Wireless LAN (optional)
Separate Sync / Composite Sync / Sync on G
RJ-45 and Wireless LAN (optional)

ELECTRICAL

Power Requirements
Input Current
Power Consumption (Normal/ECO Mode/Standby/
Standby-Power Saving

100 - 240V AC, 50/60Hz
5.1A
PA500X/PA550W/PA600X: 464W / 372W / 16W / 0.2W
PA500U: 477W / 384W / 16W / 0.2W

MECHANICAL

Optional Lenses
Installation Orientation
Dimensions (WxDxH)
Net Weight

NP11FL, NP12ZL, NP13ZL, NP14ZL, NP15ZL
Floor/Front, Floor/Rear, Ceiling/Front, Ceiling/Rear
19.7 x 14.4 x 6.5 in. / 499 x 366 x 164mm
PA500X/PA550W/PA600X: 17 lbs. / 7.7 kg
PA500U: 17.2 lbs. / 7.8 kg
PA500X/PA550W/PA600X: 38 dB normal / 31 dB eco
PA500U: 38 dB normal / 32 dB eco
USA: UL 1950 FCC Class B, Canada: CSA950 (C-UL), NOM

ENVIRONMENTAL

Operating Temperature
Humidity
Storage

41° - 104°F / 5° - 40°C
20-80% non-condensing
-14° - 122°F / -10° - 50°C

ACCESSORIES

SCP200
NP3250CM
NP11FL
NP12ZL
NP13ZL
NP14ZL
NP15ZL
NP30ZL
NP21LP
NP02CV
NP02LM1
RMT-PJ33
PW RCRD-PJPX
RGBCBL-PJPX
NECEW2-I
ADVEXON1-I
ADVEXON2-I
NECECO

Suspended ceiling plate
Ceiling mount
0.8:1 fixed short throw lens
1.19 - 1.56:1 zoom lens
1.5 - 3.0:1 zoom lens
2.97 - 4.79:1 zoom lens
4.7 - 7.2:1 zoom lens
0.79 - 1.04:1 zoom lens
Replacement lamp
Terminal cover
Wireless LAN module
Replacement remote control
Power cable
RGB cable
Extends term of parts and labor warranty to 4 years
Extends term of InstaCare service program to 2 years
Extends term of InstaCare service program to 3 years
Projector recycling program, disposal certificate



3D Reform, Advanced AccuBlend, AutoSense and ECO Mode are trademarks of NEC Display Solutions. HDMI, the HDMI Logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. All other brand or product names are trademarks or registered trademarks of their respective holders. Product specifications subject to change.

©2013 NEC Display Solutions of America, Inc. All rights reserved.
rev 8.14.14

* Lens does not ship with the projector.
Additional accessories are available, including screens, carts, mount accessories and replacement cables.
Visit www.necdisplay.com for details.